


TOP VIEW

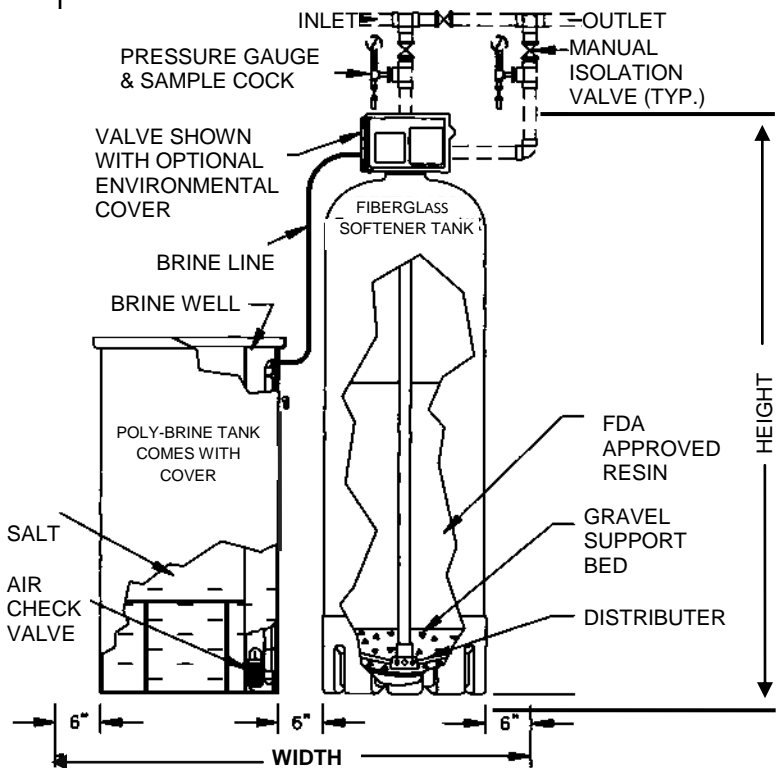


FRONT VIEW OF SINGLE WATER SOFTENER

Model	Capacity (grains) Per Tank	Service Flow Rate (gpm)	Backwash Flow Rate (gpm)	Resin Volume (cu. ft.)	Mineral Tank Size (inches)	Brine Tank Size (inches)	Brine Tank Salt Capacity (lbs)	Shipping Weight (lbs)
C-FL-90-1.5	90,000	30-42	5	3	14 x 65	18 x 36	350	240
C-FL-210-1.5	105,000	29-40	5	3.5	14 x 65	18 x 36	350	290
C-FL-135-1.5	135,000	32-44	7	4.5	16 x 65	18 x 36	350	375
C-FL-210-1.5	210,000	39-52	12	7	21 x 62	24 x 40	750	585
C-FL-300-1.5	300,000	40-54	15	10	24 x 71	24 x 54	1000	710

NOTE:

1. Adjustable 5-cycle control valve, up-flow backwash, down-flow brining and slow rinse, rapid rinse.
2. Balanced piston, seal and spacer design to pilot service flow and regeneration.
3. Solid lead free brass body.
4. 1-1/2" top mount control valve ideal for smaller commercial applications.
5. Consistent brining with timed brine refill.
6. Choice of 12 day time clock or metered.

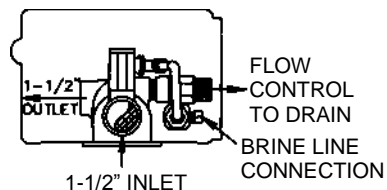

REAR VIEW OF 2850 VALVE

This document contains confidential/proprietary information which is the property of Krudico, Inc., and furnished with the understanding that the information herein will be held in confidence and will not be duplicated, used, or disclosed without the written permission of Krudico, Inc.



KRUDICO, INC.
 308 E. 4TH Street, PO Box 248
 Auburn, IA 51433
 Jerry Kruse, President
 712-688-2284

**C-FL Series Single Water Softener
 1.5" 2850 Valve Calendar Clock Initiated**

PROJECT _____

DATE ____/____/____

REV
1

DWG# _____